
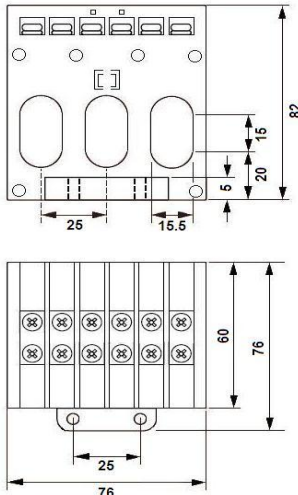
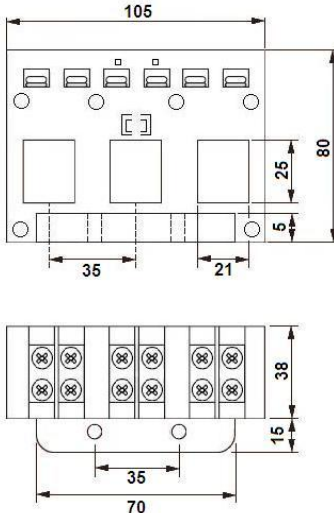


Three Phase Current Transformers

- Epoxy Potting, Double-screw fastening, safe, easy to install, portable
- Wide inner window, allowing clamping of big cables or bus-bars
- Wide range of sizes to accommodate all the existing installations
- Conforms to IEC185, BS 7626, BSEN 60044-1 and IEC 60044-1
- Built in hinged Terminal covers
- Built in foot mounting bracket for ease of installation

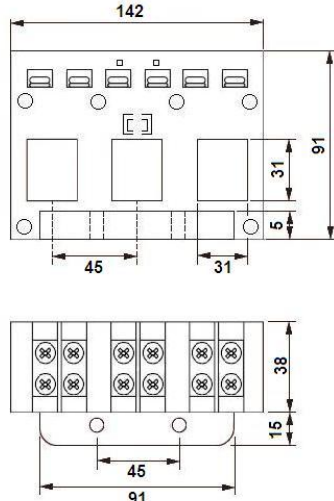

CT3X1-S	CT3X1-M	CT3X1-L																																																																																																																					
Window aperture : 15.5 x 30mm Primary current : 60 to 200A Accuracy : Class 1 Rated system voltage : 0.72/3kV Frequency : 50-400Hz Measuring range : 5%In-130%In Test Voltage : 3.0KV/1mA/1min Weight : 500g	Window aperture : 21 x 25mm Primary current : 60 to 250A Accuracy : Class 1 Rated system voltage : 0.72/3kV Frequency : 50-400Hz Measuring range : 5%In-130%In Test Voltage : 3.0KV/1mA/1min Weight : 580g	Window aperture : 31 x 31mm Primary current : 250 to 630A Accuracy : Class 1 Rated system voltage : 0.72/3kV Frequency : 50-400Hz Measuring range : 5%In-130%In Test Voltage : 3.0KV/1mA/1min Weight : 690g																																																																																																																					
Dimensions	Dimensions	Dimensions																																																																																																																					
																																																																																																																							
Type Selection	Type Selection	Type Selection																																																																																																																					
<table border="1"> <thead> <tr> <th>Ratio</th> <th>Burden</th> <th>Class</th> </tr> </thead> <tbody> <tr><td>60A/5A</td><td>1.5VA</td><td>1.0</td></tr> <tr><td>80A/5A</td><td>1.5VA</td><td>1.0</td></tr> <tr><td>100A/5A</td><td>1.5VA</td><td>1.0</td></tr> <tr><td>125A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>150A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>200A/5A</td><td>2.5VA</td><td>1.0</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Ratio</th> <th>Burden</th> <th>Class</th> </tr> </thead> <tbody> <tr><td>60A/1A</td><td>1.5VA</td><td>0.5</td></tr> <tr><td>80A/1A</td><td>1.5VA</td><td>0.5</td></tr> <tr><td>100A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>150A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>200A/1A</td><td>2.5VA</td><td>0.5</td></tr> </tbody> </table>	Ratio	Burden	Class	60A/5A	1.5VA	1.0	80A/5A	1.5VA	1.0	100A/5A	1.5VA	1.0	125A/5A	2.5VA	1.0	150A/5A	2.5VA	1.0	200A/5A	2.5VA	1.0	Ratio	Burden	Class	60A/1A	1.5VA	0.5	80A/1A	1.5VA	0.5	100A/1A	2.5VA	0.5	150A/1A	2.5VA	0.5	200A/1A	2.5VA	0.5	<table border="1"> <thead> <tr> <th>Ratio</th> <th>Burden</th> <th>Class</th> </tr> </thead> <tbody> <tr><td>100A/5A</td><td>1.5VA</td><td>1.0</td></tr> <tr><td>125A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>150A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>160A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>200A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>250A/5A</td><td>2.5VA</td><td>1.0</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Ratio</th> <th>Burden</th> <th>Class</th> </tr> </thead> <tbody> <tr><td>100A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>125A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>150A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>200A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>250A/1A</td><td>2.5VA</td><td>0.5</td></tr> </tbody> </table>	Ratio	Burden	Class	100A/5A	1.5VA	1.0	125A/5A	2.5VA	1.0	150A/5A	2.5VA	1.0	160A/5A	2.5VA	1.0	200A/5A	2.5VA	1.0	250A/5A	2.5VA	1.0	Ratio	Burden	Class	100A/1A	2.5VA	0.5	125A/1A	2.5VA	0.5	150A/1A	2.5VA	0.5	200A/1A	2.5VA	0.5	250A/1A	2.5VA	0.5	<table border="1"> <thead> <tr> <th>Ratio</th> <th>Burden</th> <th>Class</th> </tr> </thead> <tbody> <tr><td>250A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>300A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>400A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>500A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>600A/5A</td><td>2.5VA</td><td>1.0</td></tr> <tr><td>630A/5A</td><td>2.5VA</td><td>1.0</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Ratio</th> <th>Burden</th> <th>Class</th> </tr> </thead> <tbody> <tr><td>250A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>300A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>400A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>500A/1A</td><td>2.5VA</td><td>0.5</td></tr> <tr><td>630A/1A</td><td>2.5VA</td><td>0.5</td></tr> </tbody> </table>	Ratio	Burden	Class	250A/5A	2.5VA	1.0	300A/5A	2.5VA	1.0	400A/5A	2.5VA	1.0	500A/5A	2.5VA	1.0	600A/5A	2.5VA	1.0	630A/5A	2.5VA	1.0	Ratio	Burden	Class	250A/1A	2.5VA	0.5	300A/1A	2.5VA	0.5	400A/1A	2.5VA	0.5	500A/1A	2.5VA	0.5	630A/1A	2.5VA	0.5
Ratio	Burden	Class																																																																																																																					
60A/5A	1.5VA	1.0																																																																																																																					
80A/5A	1.5VA	1.0																																																																																																																					
100A/5A	1.5VA	1.0																																																																																																																					
125A/5A	2.5VA	1.0																																																																																																																					
150A/5A	2.5VA	1.0																																																																																																																					
200A/5A	2.5VA	1.0																																																																																																																					
Ratio	Burden	Class																																																																																																																					
60A/1A	1.5VA	0.5																																																																																																																					
80A/1A	1.5VA	0.5																																																																																																																					
100A/1A	2.5VA	0.5																																																																																																																					
150A/1A	2.5VA	0.5																																																																																																																					
200A/1A	2.5VA	0.5																																																																																																																					
Ratio	Burden	Class																																																																																																																					
100A/5A	1.5VA	1.0																																																																																																																					
125A/5A	2.5VA	1.0																																																																																																																					
150A/5A	2.5VA	1.0																																																																																																																					
160A/5A	2.5VA	1.0																																																																																																																					
200A/5A	2.5VA	1.0																																																																																																																					
250A/5A	2.5VA	1.0																																																																																																																					
Ratio	Burden	Class																																																																																																																					
100A/1A	2.5VA	0.5																																																																																																																					
125A/1A	2.5VA	0.5																																																																																																																					
150A/1A	2.5VA	0.5																																																																																																																					
200A/1A	2.5VA	0.5																																																																																																																					
250A/1A	2.5VA	0.5																																																																																																																					
Ratio	Burden	Class																																																																																																																					
250A/5A	2.5VA	1.0																																																																																																																					
300A/5A	2.5VA	1.0																																																																																																																					
400A/5A	2.5VA	1.0																																																																																																																					
500A/5A	2.5VA	1.0																																																																																																																					
600A/5A	2.5VA	1.0																																																																																																																					
630A/5A	2.5VA	1.0																																																																																																																					
Ratio	Burden	Class																																																																																																																					
250A/1A	2.5VA	0.5																																																																																																																					
300A/1A	2.5VA	0.5																																																																																																																					
400A/1A	2.5VA	0.5																																																																																																																					
500A/1A	2.5VA	0.5																																																																																																																					
630A/1A	2.5VA	0.5																																																																																																																					